



GENERAL DESCRIPTION


The ModuLink ±50A isolated current sensors are easy-to-use devices, tailored for power electronics applications. When employed with imperix’s BoomBox control platform, the sensors provide plug&play connectivity and can be directly powered by the control platform.

The devices produce a balanced full-differential output signal, proportional to the current voltage. For best EMC performance, the output signal is typically meant to be carried by a shielded twisted pair embedded in RJ45-type cables.

Modulink sensors can be easily clipped on 35mm DIN rails and are compatible with up to 6 mm² wires. They guarantee the galvanic isolation of the sensing circuit up to 1kV_{RMS}.

KEY FEATURES AND SPECIFICATIONS

- ± 50 A measuring range
- 0.2-6mm² conductor cross-section (AWG 10-24)
- Minimum 200kHz measurement bandwidth
- Balanced full-differential signal output
- Typical sensitivity of 99.0 mV/A
- 1.0kV_{PK} galvanic isolation (permanent)
- ± 0.45% typical precision
- Compatible with standard ± 15V power supplies
- Mountable on 35 mm DIN rails

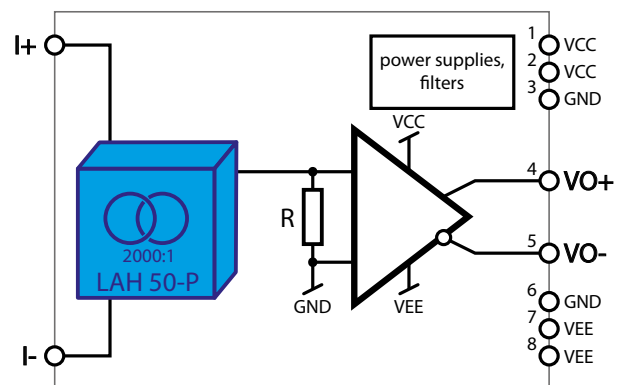

BOOMBOX CONFIGURATION


The recommended configuration for the BoomBox is shown in Table 1:

Sensitivity	Filter	Gain	Input
99.0 mV/A	Filter=NONE	G=2	High-impedance

Table 1. Suggested configuration of the BoomBox

Imperix recommends to consider calibrating each sensor for improved accuracy. When difficult, at least the offset shall be compensated for.

MECHANICAL DIMENSIONS

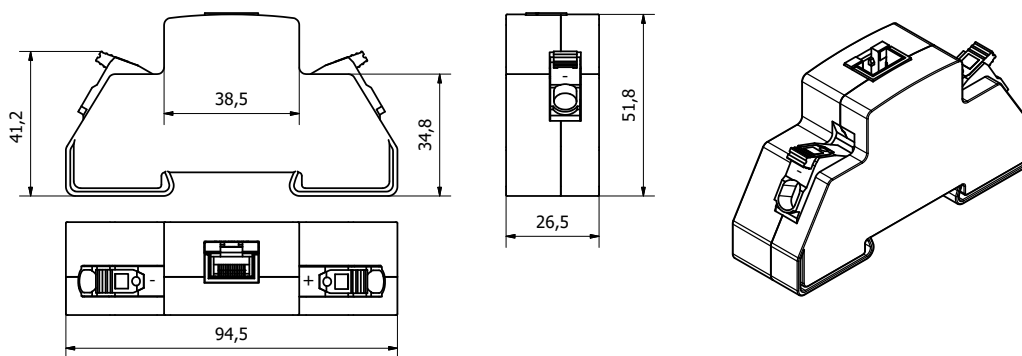

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Notes	Min.	Typ.	Max.	Unit
Maximum input current - rms	$I_{in,max,rms}$	long term, thermally limited	-	40	-	A
Maximum working isolation voltage	V_{IORM}		-	1.0	-	kV _{PEAK}
Highest allowable short-term isolation voltage (60s)	V_{IOTM}		-	4.0	-	kV _{PEAK}
Power supply voltages	$\pm VCC$		± 12.0	± 15.0	± 16.0	V

SENSOR PARAMETERS

Parameter	Symbol	Test conditions	Min.	Typ.	Max.	Unit
Nominal input current – peak	$I_{in,nom,peak}$		-	± 50	-	A
Nominal input current – rms	$I_{in,nom,rms}$		-	± 35	-	A
Linear input current range	$I_{in,range}$		-	± 110	-	A
Nominal sensitivity	G		-	99.0	-	mV/A
Uncalibrated sensitivity error ⁶	G_{ERR}	$T_A = 25^\circ C$	-	± 0.45	± 2.35	%
Sensitivity error over temperature	$G_{ERR,t}$	$T_A = 25^\circ to 85^\circ C$	-	± 0.4	-	%
Input-referred offset	I_O	$T_A = 25^\circ C$	-	± 0.05	± 0.4	A
Input-referred offset over temperature	$I_{O,t}$	$T_A = 25^\circ to 85^\circ C$	-	± 0.2	± 0.6	A
Measurement bandwidth	f_{3dB}		-	200	-	kHz
Settling time	t_d	10%, -45A to +45A input step	-	-	2.0	μs
Input impedance	R_{IN}	$T_A = 25^\circ C$	-	-	2.1	m Ω
Input-referred noise	I_n		-	0.05	-	A
Output voltage range	$V_{o,max}$		-	± 4.95	$\pm VCC$	V
Output current (short circuit)	I_{OUT}		-	± 85	-	mA
Power consumption	P_{DD}	On $\pm 15V$ power supplies, $I_m = 0$	-	450	-	mW

⁶ Valid only for sensors sold after January 2017.

CONNECTOR PINOUT

Pin	Color	Description	Pin	Color	Description
1	orange stripe	+15 V	5	blue stripe	Signal negative output
2	orange solid		6	green solid	0 V
3	green stripe	0 V	7	brown stripe	-15 V
4	blue solid	Signal positive output / current output	8	brown solid	

CONTACT

imperix Ltd.

Rue de la Dixence 10
1950 Sion, Switzerland
phone: +41 (0)27 552 06 60
fax: +41 (0)27 552 06 69

www.imperix.com, sales@imperix.com

ABOUT US

Imperix is a company established in Sion, Switzerland. Its name is derived from the Latin verb imperare, which stands for controlling and refers to the company's core business: the control of power electronic systems. Imperix SA commercializes hardware and software solutions dedicated to the fast and secure implementation of pilot systems and plants in the field of power conversion, energy storage and smart grids.

NOTE

While every effort has been made to ensure the accuracy of this publication, no responsibility can be accepted for errors or omissions. Data may change, as well as legislation, and the reader is strongly advised to obtain copies of the most recently issued regulations, standards, and guidelines. This publication does not form the basis of a contract. Copyright 2016. All rights reserved.